




DIGITIZED 559




PERIPHERAL 988

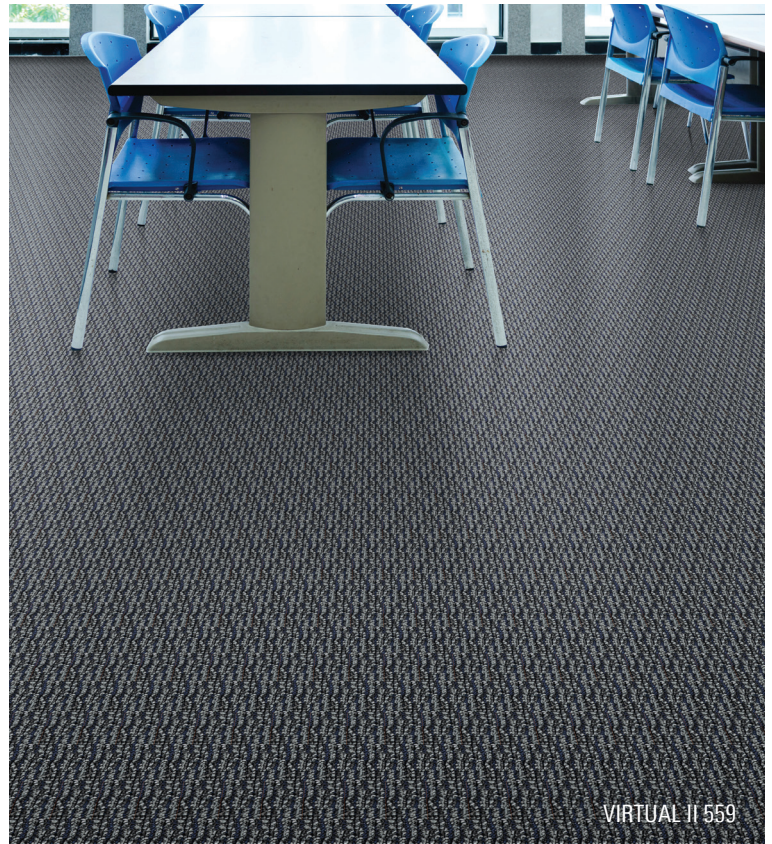


VIRTUAL II 559

The Actualization Collection captures the imperfections and ruggedness of the earth's surfaces by creating three powerful products with six earthen inspired colorways creating neutral hues for any interior. Each style offers a unique pattern with dimensional texture, comprised with a highly twisted yarn that creates tactile distinction with careful attention to detail.

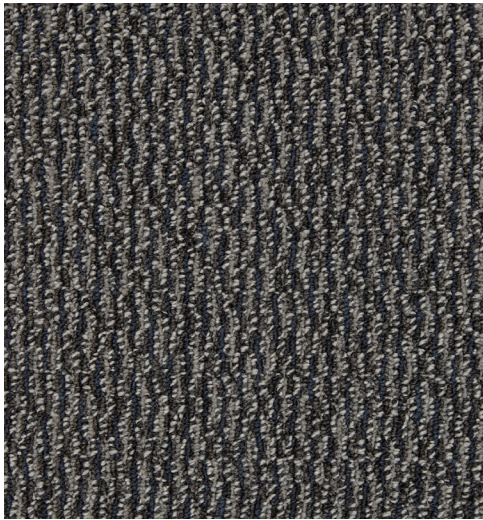

Visual Depth
559

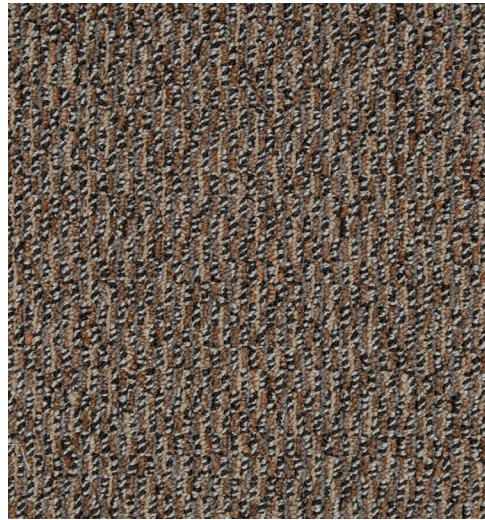

Touch Sense
828



Augmented Reality
888



Interactive Adapter
949



Sensory Engagement
978



Emerging Form
989



Haptic Experience
988

DIGITIZED

Style Number	AQ190
Construction	Tufted
Surface Appearance	Graphic Loop
Gauge	1/10 (39.37 rows per 10cm)
Tufted Weight	22 oz/yd ² (746 g/m ²)
Density	5,866
Dye Method	100% Solution Dyed
Fiber Type	Envirostrand™ SD PET
Soil Release Technology	Mohawk Protection Plus Soil
Primary Backing	Woven Polypropylene
Secondary Backing	Weldlok®
Indoor Air Quality	Green Label Plus Certified # 0350
Width	12' width (3.66 m)
Pattern Repeat	1.6" (W) x 1.6" (L)
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Country of Origin	USA
Warranties	10-Year Limited Wear Warranty 10-Year Limited Static Protection 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants

PERIPHERAL

Style Number	AQ191
Construction	Tufted
Surface Appearance	Graphic Loop
Gauge	1/10 (39.37 rows per 10cm)
Tufted Weight	24 oz/yd ² (814 g/m ²)
Density	6,545
Dye Method	100% Solution Dyed
Fiber Type	Envirostrand™ SD PET
Soil Release Technology	Mohawk Protection Plus Soil
Primary Backing	Woven Polypropylene
Secondary Backing	Weldlok®
Indoor Air Quality	Green Label Plus Certified # 0350
Width	12' width (3.66m)
Pattern Repeat	0.4" (W) x 0.5" (L)
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Country of Origin	USA
Warranties	10-Year Limited Wear Warranty 10-Year Limited Static Protection 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants



Up to 2,000 sq. yd. available within 10 business days or less

EnviroStrand^{SD}

VIRTUAL II

Style Number	AQ192
Construction	Tufted
Surface Appearance	Graphic Loop
Gauge	1/10 (39.37 rows per 10cm)
Tufted Weight	22 oz/yd ² (746 g/m ²)
Density	5,697
Dye Method	100% Solution Dyed
Fiber Type	Envirostrand™ SD PET
Soil Release Technology	Mohawk Protection Plus Soil
Primary Backing	Woven Polypropylene
Secondary Backing	Weldlok®
Indoor Air Quality	Green Label Plus Certified # 0350
Width	12' width (3.66m)
Pattern Repeat	1.6" (W) x 1.6" (L)
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Country of Origin	USA
Warranties	10-Year Limited Wear Warranty 10-Year Limited Static Protection 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants



Up to 2,000 sq. yd. available within 10 business days or less

EnviroStrand^{SD}