
METROSCAPES COLLECTION






Metroscapes Collection is a contemporary modern day collection which is inspired by timeless vintage woven textiles. This collection from Aladdin Commercial is comprised of four small to mid-scaled patterns updated with exaggerated textural elements that provide a modern tactile appeal.



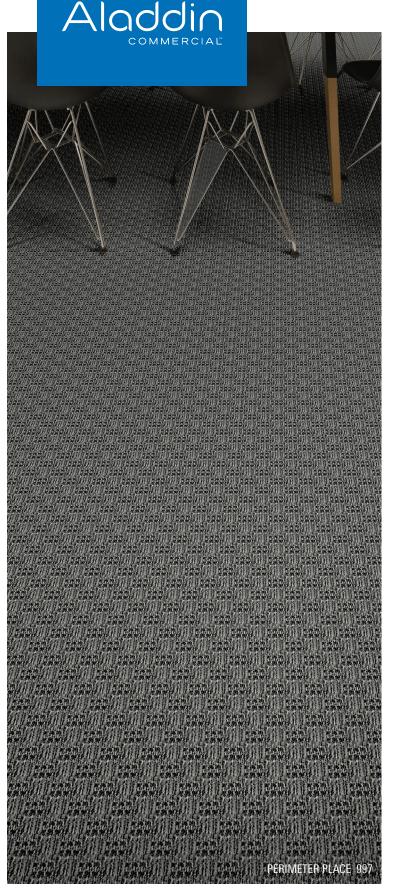



CHEX II 599

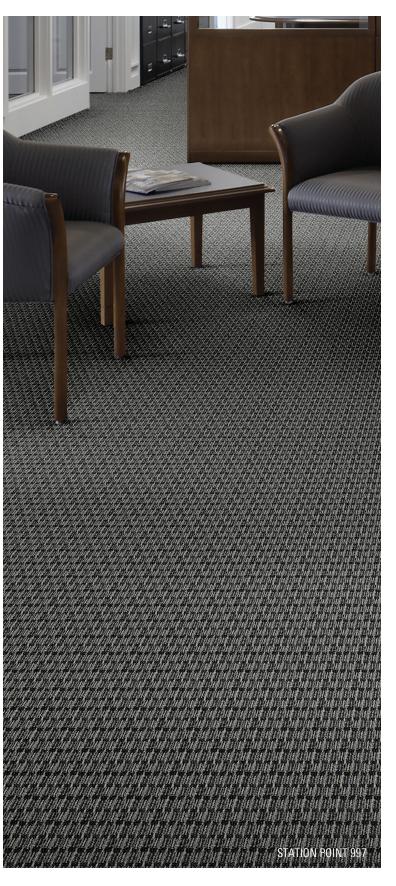



CITY PARK II

Graphic Loop

PERIMETER PLACE

Graphic Loop

Style Number AQ182 AQ183

Construction Tufted Tufted

Gauge 1/10 (39.37 rows per 10cm) 1/10 (39.37 rows per 10cm)

Tufted Weight 18oz/yd² (610 g/m²) 18oz/yd² (610 g/m²)

Density 4,468 4,348

Dye Method100% Solution Dyed100% Solution DyedFiber TypeEnvirostrand™ SD PETEnvirostrand™ SD PET

Soil Release Technology Mohawk Protection Plus Soil Mohawk Protection Plus Soil

Primary Backing Woven Polypropylene Woven Polypropylene

Secondary Backing Weldlok® Weldlok®

Indoor Air Quality Green Label Plus Certified # 0350 Green Label Plus Certified # 0350

 Width
 12' width (3.66m)
 12' width (3.66m)

 Pattern Repeat
 0.6'' (W) x 0.8'' (L)
 3.6'' (W) x 3.3'' (L)

Flammability ASTM E 648 Class 1 (Glue Down) ASTM E 648 Class 1 (Glue Down)

Smoke Density ASTM E 662 Less than 450 ASTM E 662 Less than 450

Static Propensity AATCC-134 Under 3.5 KV AATCC-134 Under 3.5 KV

Country of Origin USA USA

Warranties 10-Year Limited Wear Warranty 10-Year Limited Wear Warranty

10-Year Limited Static Protection 10-Year Limited Static Protection

10-Year Limited Stain Resistance Warranty 10-Year Limited Stain Resistance Warranty

10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Light Warranty

10-Year Limited Colorfastness to Atmospheric Contaminants 10-Year Limited Colorfastness to Atmospheric Contaminants



Surface Appearance

Up to 2,000 sq. yd. available within 10 business days or less

EnviroStrand SD



STATION POINT

CHEX II

Style Number AQ184 AQ185

Construction Tufted Tufted

Surface Appearance Graphic Loop Graphic Loop

Gauge 1/10 (39.37 rows per 10cm) 1/10 (39.37 rows per 10cm)

Tufted Weight 18oz/yd² (610 g/m²) 20oz/yd² (678 g/m²)

Density 3,927 6,101

 Dye Method
 100% Solution Dyed

 Fiber Type
 Envirostrand™ SD PET

 Envirostrand™ SD PET

Soil Release Technology Mohawk Protection Plus Soil Mohawk Protection Plus Soil

Primary Backing Woven Polypropylene Woven Polypropylene

Secondary Backing Weldlok® Weldlok®

Indoor Air Quality Green Label Plus Certified # 0350 Green Label Plus Certified # 0350

 Width
 12' width (3.66m)
 12' width (3.66m)

 Pattern Repeat
 1.2'' (W) x 2.5'' (L)
 0.4'' (W) x 1.0'' (L)

Flammability ASTM E 648 Class 1 (Glue Down) ASTM E 648 Class 1 (Glue Down)

Smoke Density ASTM E 662 Less than 450 ASTM E 662 Less than 450

Static Propensity AATCC-134 Under 3.5 KV AATCC-134 Under 3.5 KV

Country of Origin USA USA

Warranties 10-Year Limited Wear Warranty 10-Year Limited Wear Warranty

10-Year Limited Static Protection 10-Year Limited Static Protection

10-Year Limited Stain Resistance Warranty 10-Year Limited Stain Resistance Warranty

10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Light Warranty

10-Year Limited Colorfastness to Atmospheric Contaminants 10-Year Limited Colorfastness to Atmospheric Contaminants



Up to 2,000 sq. yd. available within 10 business days or less

EnviroStrand SD

