



## RULE BREAKER TILE | RULE BREAKER STRIPE TILE

Rule Breaker and Rule Breaker Stripe Tiles are minimal and pure in their styling concepts. Rule Breaker Stripe features architectural accent stripes that are reflective of modern design. Rule Breaker Tile is a heathered loop that mimics broadloom while offering easy replacement of tiles, when necessary. They both come in 6 tonal colorways to create a sophisticated approach for commercial floors.

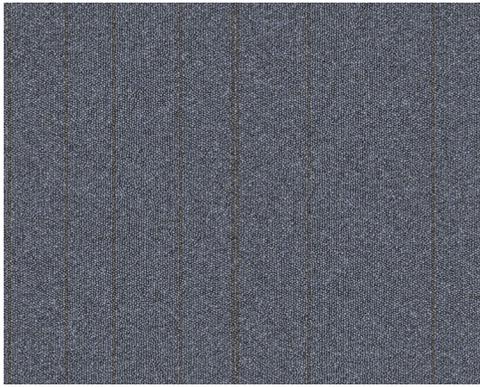


Rule Breaker Stripe Tile 589

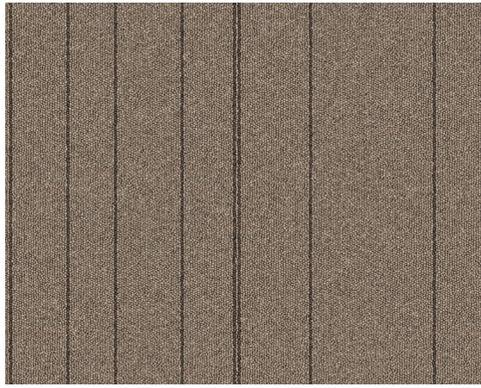

Rule Breaker Stripe Tile 748




Rule Breaker Stripe Tile 869

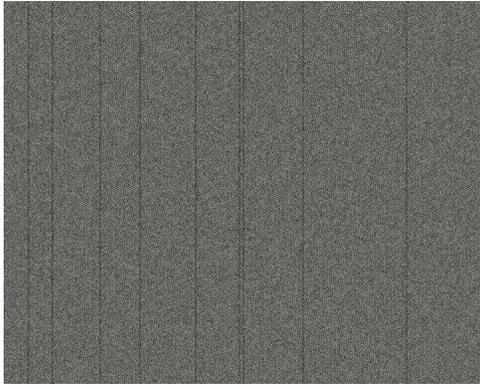


Rule Breaker Stripe Tile 949




Rule Breaker Stripe Tile 959

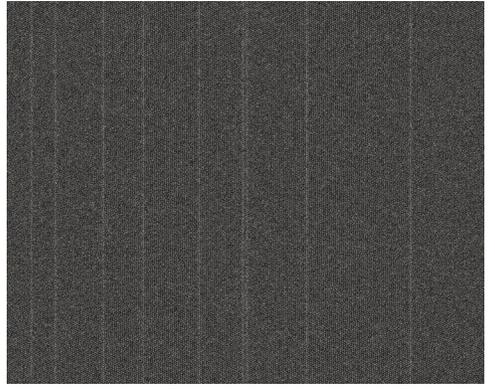

Rule Breaker Stripe Tile 979

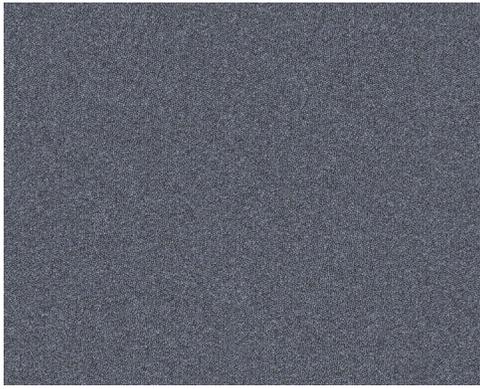


Rule Breaker Tile 589

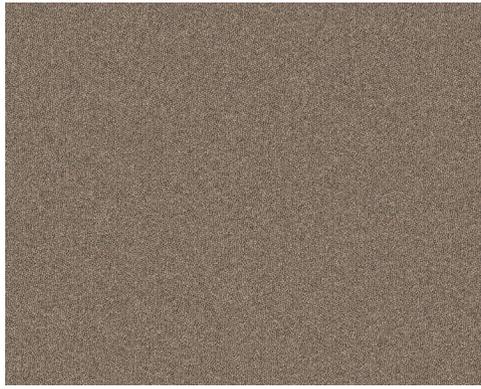

Rule Breaker Tile 748




Rule Breaker Tile 869

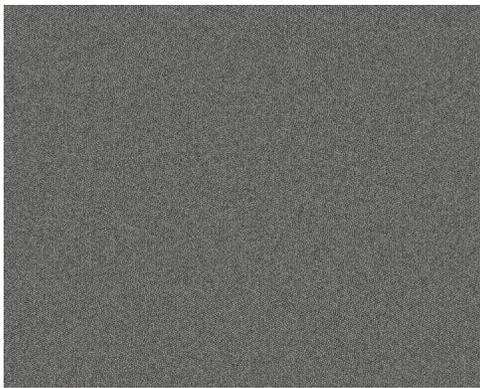

Rule Breaker Tile 949



Rule Breaker Tile 959

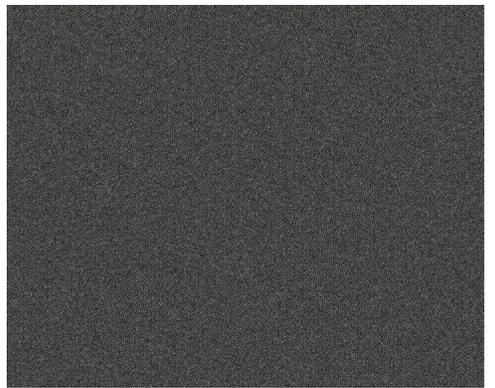

Rule Breaker Tile 979

## RULE BREAKER TILE

<b>Style Name / Number</b>	Rule Breaker Tile / 2B134
<b>Construction</b>	Tufted
<b>Surface Appearance</b>	Graphic Loop
<b>Gauge</b>	1/10" (39.37 rows per 10 cm)
<b>Dye Method</b>	100% Solution Dyed
<b>Fiber Type</b>	Envirostrand™ SD
<b>Stain Release Technology</b>	Mohawk Protection Plus Stain
<b>Soil Release Technology</b>	Mohawk Protection Plus Soil
<b>Primary Backing</b>	Non Woven Synthetic
<b>Secondary Backing</b>	UltraSet® Matrix
<b>Size</b>	24" x 24" (.6096 m x .6096 m)
<b>Yards per carton</b>	10.66
<b>Installation Method</b>	Quarter Turn / Brick Ashlar / Vertical Ashlar / Monolithic
<b>Flammability</b>	ASTM E 648 Class 1 (Glue Down)
<b>Smoke Density</b>	ASTM E 662 Less than 450
<b>Static Propensity</b>	AATCC-134 Under 3.5 KV
<b>Warranties</b>	10 Year Limited Wear Warranty 10 Year Limited Static Protection Warranty 10 Year Limited Stain Resistance Warranty 10 Year Colorfastness to Light Warranty 10 Year Limited Colorfastness to Atmospheric Contaminants 10 Year Limited Edge Ravel, Zippering, Delamination and Dimensional Stability Warranty

## RULE BREAKER STRIPE TILE

<b>Style Name / Number</b>	Rule Breaker Stripe Tile / 2B135
<b>Construction</b>	Tufted
<b>Surface Appearance</b>	Graphic Loop
<b>Gauge</b>	1/10" (39.37 rows per 10 cm)
<b>Dye Method</b>	100% Solution Dyed
<b>Fiber Type</b>	Envirostrand™ SD
<b>Stain Release Technology</b>	Mohawk Protection Plus Stain
<b>Soil Release Technology</b>	Mohawk Protection Plus Soil
<b>Primary Backing</b>	Non Woven Synthetic
<b>Secondary Backing</b>	UltraSet® Matrix
<b>Size</b>	24" x 24" (.6096 m x .6096 m)
<b>Yards per carton</b>	10.66
<b>Installation Method</b>	Quarter Turn / Brick Ashlar / Vertical Ashlar / Monolithic
<b>Flammability</b>	ASTM E 648 Class 1 (Glue Down)
<b>Smoke Density</b>	ASTM E 662 Less than 450
<b>Static Propensity</b>	AATCC-134 Under 3.5 KV
<b>Warranties</b>	10 Year Limited Wear Warranty 10 Year Limited Static Protection Warranty 10 Year Limited Stain Resistance Warranty 10 Year Colorfastness to Light Warranty 10 Year Limited Colorfastness to Atmospheric Contaminants 10 Year Limited Edge Ravel, Zippering, Delamination and Dimensional Stability Warranty



Up to 2,000 sq. ft. available within 10 business days or less

EnviroStrand SD

