
# 


### RULE BREAKER COLLECTION



Create a textural look that will last with Rule Breaker. From the extensive range of warm, rich colors to the durability, Rule Breaker is made for commercial environments.










\*Garnet 385 Cobalt 589





\*678 Greenery



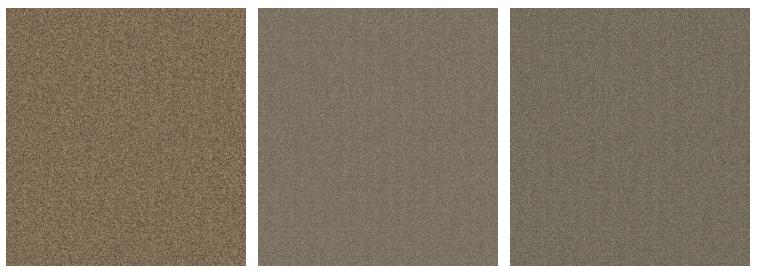


Praline 748

\*Wheat 758 \*Stoney 788


\*New Colors for 2019







Pewter 949

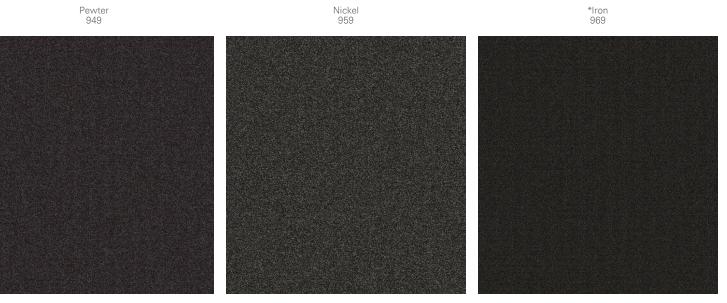

\*Twilight 977

Charcoal 979

Onyx 999

\*New Colors for 2019



#### **RULE BREAKER**

AQ94

## RULE BREAKER 20 RULE BREAKER 26 RULE BREAKER 26 WELDLOK PLUS

|                         | AUJT                           |
|-------------------------|--------------------------------|
| Construction            | Tufted                         |
| Surface Appearance      | Level Loop                     |
| Gauge                   | 1/10" (39.37 rows              |
| Pile Weight             |                                |
| Density                 | 4,716                          |
| Dye Method              | 100% Solution Dye              |
| Fiber Type              | Envirostrand <sup>™</sup> SD P |
| Soil Release Technology | Mohawk Protectio               |
| Primary Backing         | Woven Polypropyle              |
| Secondary Backing       | Weldlok®                       |
| Indoor Air Quality      | Green Label Plus C             |
| Width                   | 12' width (3.66 m)             |
| Pattern Repeat          | None                           |
| Flammability            | ASTM E 648 Class               |
| Smoke Density           | ASTM E 662 Less t              |
| Static Propensity       | AATCC-134 Under                |
| Country of Origin       | USA                            |
| Warranties              | 10-Year Limited W              |
|                         | 10-Year Static Prot            |
|                         |                                |

Style Number

per 10 cm) ed PET on Plus Soil lene Certified # 0350 I (Glue Down) than 450 3.5 KV Vear Warranty otection 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants

AQ92 (12') 2B105 (15') Tufted Level Loop 1/10" (39.37 rows per 10 cm) 20 oz/yd2 (678 g/m2) 5,592 100% Solution Dyed Envirostrand<sup>™</sup> SD PET Mohawk Protection Plus Soil Woven Polypropylene Weldlok® Green Label Plus Certified # 0350 12' width (3.66 m) and 15' width (4.57 m) None ASTM E 648 Class I (Glue Down) ASTM E 662 Less than 450 AATCC-134 Under 3.5 KV USA 10-Year Limited Wear Warranty 10-Year Static Protection 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants

AQ93 (12') 2B106 (15') Tufted Level Loop 1/10" (39.37 rows per 10 cm) 26 oz/yd2 (882 g/m2) 5,305 100% Solution Dyed Envirostrand<sup>™</sup> SD PET Mohawk Protection Plus Soil Woven Polypropylene Weldlok® Green Label Plus Certified # 0350 12' width (3.66 m) and 15' width (4.57 m) None ASTM E 648 Class I (Glue Down) ASTM E 662 Less than 450 AATCC-134 Under 3.5 KV USA 10-Year Limited Wear Warranty 10-Year Static Protection 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Atmospheric Contaminants

#### 2B193

Tufted Level Loop 1/10" (39.37 rows per 10 cm) 26 oz/yd2 (882 g/m2) 5,305 100% Solution Dyed Envirostrand<sup>™</sup> SD PET Mohawk Protection Plus Soil Woven Polypropylene Weldlok® Plus Green Label Plus Certified # 0350 12' width (3.66 m) and 15' width (4.57 m) None ASTM E 648 Class I (Glue Down) ASTM E 662 Less than 450 AATCC-134 Under 3.5 KV USA 10-Year Limited Wear Warranty 10-Year Static Protection 10-Year Limited Stain Resistance Warranty 10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to

10-Year Limited Colorfastness t Atmospheric Contaminants

Up to 2,000 sq. yd. available within 10 business days or less

Envir: Strand SD