URBAN SHIFT COLLECTION






Inspired by a bird's eye view of Urban Cities, the Urban Shift Collection takes a topographical perspective on textural patterns and design elements of big cities by overlooking landmarks, streets, intersections, parks and terrain. This collection of four classic, tactile inspired patterns weaves a connection and pathway in bringing the feel of the outside city and it's landscape indoors for the commercial interior floors.

URBAN SHIFT COLLECTION





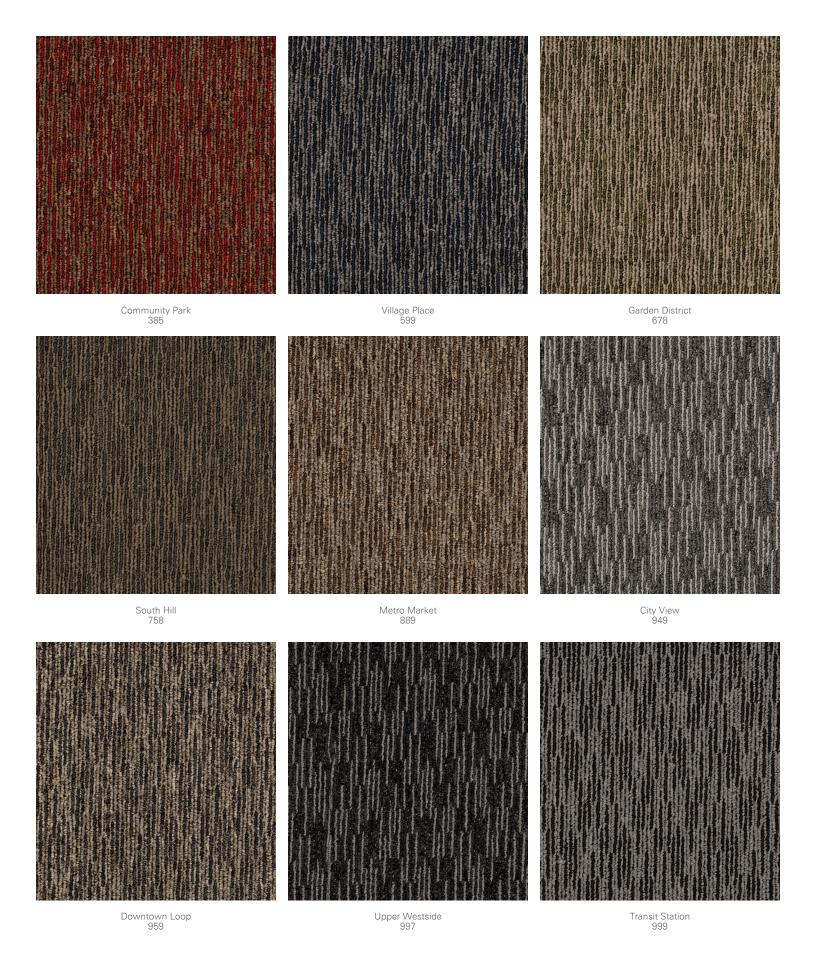



CORNER BLOCK

PLAZA POINT

Style Number AQ186 AQ187

Construction Tufted Tufted

Surface Appearance Textured Patterned Loop Textured Patterned Loop

Gauge 1/10 (39.37 rows per 10cm) 1/10 (39.37 rows per 10cm)

Tufted Weight 20oz/yd² (678 g/m²) 20oz/yd² (678 g/m²)

Density 5,034 5,581

Dye Method100% Solution Dyed100% Solution DyedFiber TypeEnvirostrand™ SD PETEnvirostrand™ SD PET

Soil Release Technology Mohawk Protection Plus Soil Mohawk Protection Plus Soil

Primary Backing Woven Polyproplyene Woven Polyproplyene

Secondary Backing Weldlok® Weldlok®

Indoor Air Quality Green Label Plus Certified # 0350 Green Label Plus Certified # 0350

NSF 140 Gold Gold

 Width
 12' width (3.66m)
 12' width (3.66m)

 Pattern Repeat
 1.2" (W) x 1.3" (L)
 2.4" (W) x 4.6" (L)

Flammability ASTM E 648 Class 1 (Glue Down) ASTM E 648 Class 1 (Glue Down)

Smoke DensityASTM E 662 Less than 450ASTM E 662 Less than 450Static PropensityAATCC-134 Under 3.5 KVAATCC-134 Under 3.5 KV

Country of Origin USA USA

Warranties 10-Year Limited Wear Warranty 10-Year Limited Wear Warranty

10-Year Limited Static Protection 10-Year Limited Static Protection

10-Year Limited Stain Resistance Warranty 10-Year Limited Stain Resistance Warranty

10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Light Warranty

10-Year Limited Colorfastness to Atmospheric Contaminants 10-Year Limited Colorfastness to Atmospheric Contaminants



Up to 2,000 sq. yd. available within 10 business days or less

EnviroStrand SD



UNION CENTER

URBAN SQUARE II

Style Number AQ188 AQ189

Construction Tufted Tufted

Surface Appearance Textured Patterned Loop Textured Patterned Loop

Gauge 1/10 (39.37 rows per 10cm) 1/10 (39.37 rows per 10cm)

Tufted Weight 20oz/yd² (678 g/m²) 20oz/yd² (678 g/m²)

Density 5,255 5,581

 Dye Method
 100% Solution Dyed

 Fiber Type
 Envirostrand™ SD PET

 Envirostrand™ SD PET

Soil Release Technology Mohawk Protection Plus Soil Mohawk Protection Plus Soil

Primary Backing Woven Polyproplyene Woven Polyproplyene

Secondary Backing Weldlok® Weldlok®

Indoor Air Quality Green Label Plus Certified # 0350 Green Label Plus Certified # 0350

NSF 140 Gold Gold

 Width
 12' width (3.66m)
 12' width (3.66m)

 Pattern Repeat
 4.8'' (W) x 4.8'' (L)
 3.6'' (W) x 4.5'' (L)

Flammability ASTM E 648 Class 1 (Glue Down) ASTM E 648 Class 1 (Glue Down)

Smoke DensityASTM E 662 Less than 450ASTM E 662 Less than 450Static PropensityAATCC-134 Under 3.5 KVAATCC-134 Under 3.5 KV

Country of Origin USA USA

Warranties 10-Year Limited Wear Warranty 10-Year Limited Wear Warranty

10-Year Limited Static Protection 10-Year Limited Static Protection

10-Year Limited Stain Resistance Warranty 10-Year Limited Stain Resistance Warranty

10-Year Limited Colorfastness to Light Warranty 10-Year Limited Colorfastness to Light Warranty

10-Year Limited Colorfastness to Atmospheric Contaminants 10-Year Limited Colorfastness to Atmospheric Contaminants



Up to 2,000 sq. yd. available within 10 business days or less **Env**

EnviroStrand SD

