



264 REED

Featuring a wider plank design and unique visuals from textile to natural wood, Barrali from Aladdin Commercial offers performance LVT fit for a variety of commercial environments.





264 Reed



659 Hebe



718 Cane



751 Bay



888 Nova




929 Dove

## AH011

Style Name / Number	Barrali / AH011
Product Type	Commercial Grade Luxury Vinyl Tile
Overall Gauge	2.5 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force™ 1 Enhanced Urethane
Colors Available	6
Size	7.72" x 51.97" (196.09 mm x 1,320.04 mm)
Packaging SF/CTN	36.22 sf/ctn (3.364 m²/ctn); 60 ctns/pallet
Classification	ASTM F-1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F2421 - Passes - $\pm 0.10"$ max
Size and Tolerance	Tile ASTM F2055; Plank ASTM F2421 - Passes - $\pm 0.16"/$ linear foot
Thickness	ASTM F386 - Passes - as specified $\pm 0.005"$
Flexibility	ASTM F137 - Passes - 1" mandrel
Dimensional Stability	ASTM F2199 - Passes - 0.020"/linear foot max
Static Load Limit	ASTM F970 - Passes, modified at 1,500 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%, maximum single reading 10%
Slip Resistance	ASTM C1028 - Passes - Wet: greater than / equal to 0.5
Resistance to Chemicals	ASTM F925 - Passes - No more than a slight change in surface dulling, surface attack, or staining
Resistance to Light	ASTM F1515 - Passes - $\Delta E < 8$
Resistance to Heat	ASTM F1514 - Passes - $\Delta E < 8$
Critical Radiant Flux	ASTM E648 - Class 1 ( $> 0.45 \text{ W/cm}^2$ )
Smoke Density	ASTM E662 Part A - Less than 450
Installation	Glue Down
Optional Underlayment	Mohawk AccuSound™
Certification	FloorScore® Certified
Warranties	Limited 10-Year Commercial Warranty Limited 25-Year Residential Warranty

M-Force™ 1 Enhanced Urethane Finish —  
 Heavy Commercial Wear Layer —  
 High Definition Print Layer —  
 Commercial Base —  
 Fiberglass Stabilizing Layer —  
 Stabilizing Back Layer —

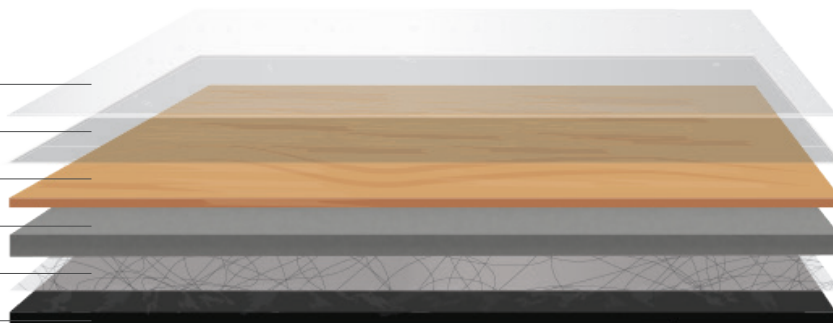

Up to 10,000 sq. ft. available within 10 business days or less