



IN BOUND

Traditional woods to contemporary grey tones with rustic flair, In Bound is a 12 mil floating LVT featuring our Uniclic® Locking System for dimensional stability and an adhesive free installation. M-Force™ Enhanced Urethane offers maximum wear and stain resistance for light commercial and contract residential spaces.

IN BOUND


Style Number	AV010
Product Type	Floating LVT
Construction	Light Commercial Grade Floating Luxury Vinyl Tile
Surface Appearance	Wood Plank
Gauge	3.2mm
Wear Layer	12 mil (0.3mm)
Finish	M-Force™ Enhanced Urethane
Colors Available	10
Size	5.91" x 48.62"
Packaging SF/CTN	31.9 (50 Cartons/Pallet) (4741 lbs/Carton)
Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F2055 - Passes - 0.010 in. max
Size and Tolerance	ASTM F2055 - Passes - ±0.016 in. per linear foot
Thickness	ASTM F386 - Passes - as specified ±0.005 in. (±0.13 mm)
Flexibility	ASTM F137 - Passes - ≤ 1.0 in., no cracks or breaks
Dimensional Stability	ASTM F2199 - Passes - 0.15% max (0.020 in. per linear foot)
Residual Indentation	ASTM F1914 - Passes - Average less than 8%
Slip Resistance	ASTM C1028 ≥ .5
Resistance to Chemicals	ASTM F925 - Passes - No Change
Resistance to Light	ASTM F1515 - Passes - ΔE ≤ 8
Resistance to Heat	ASTM F1514 - Passes - ΔE ≤ 8
Critical Radiant Flux	ASTM E648 - Passes - ≥ 0.45 watts/cm², Class 1
Smoke Density	ASTM E662 - Passes - < 450
Installation	Floating LVT with Uniclic® Locking System
Adhesive	No Adhesive Required. May use Mohawk MS160 Spray or M95.0 Acrylic
Optional Underlayment	None required, but when needed for enhanced acoustics, use Mohawk ActiveSound™
Certification	FloorScore® Certified
Warranty	Limited 10 Year Light Commercial Limited 25 Year Residential

Cover: 988 Sophisticate, 867 Sail Boat

M-FORCE

In Bound features a 12 mil commercial wear layer with M-Force™ Enhanced Urethane finish offering polish-optional for cost-effective maintenance.

- M-Force™ Enhanced Urethane Finish
- Light Commercial Wear Layer
- Decorative Print Film
- Commercial Base
- Uniclic® Locking System
- Stabilizing Back Layer

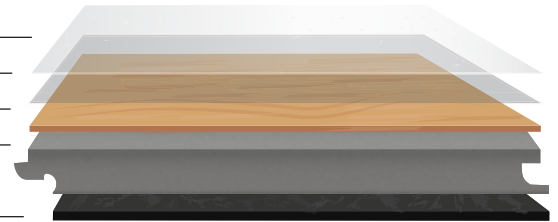

UNICLIC

Uniclic is the premier locking system in the hard surface industry, reducing time and costs associated with installation of luxury vinyl tiles. Uniclic's special tongue and groove shape easily creates a tight connection between joints and is milled on all four sides for maximum stability.



717 Dover

262 Sandy Oaks

242 Pure Honey

857 Sail Boat

872 Drifted



233 Amber Tone

988 Sophisticate

881 Bear Lake

258 Natural

822 In the Bluff



Up to 10,000 sq. ft. available within 10 business days or less