



SCHOLARSHIP II 26 BROADLOOM, 719 STEEL GRAY




SCHOLARSHIP II TILE STEEL GRAY, COLOR POP TILE, 996 BLACK BEAN


Scholarship II features a subtle texture available in broadloom and modular options for design flexibility. Excellent durability and multiple backings options make this high performance style ideal for multiple flooring end-use environments.




Sienna
837

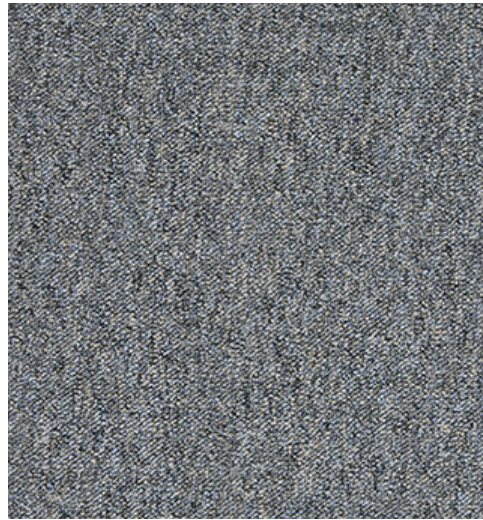


Camel
928

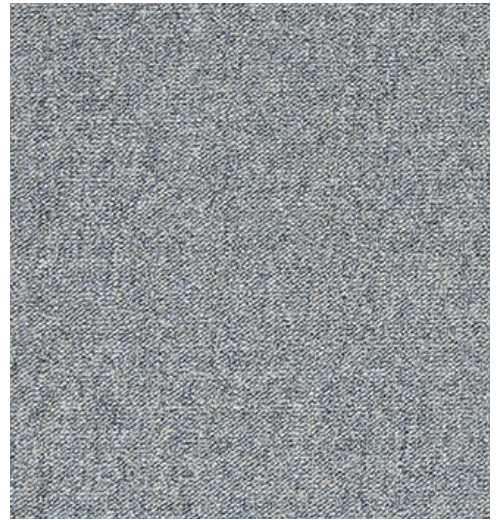

Birch Gray
948

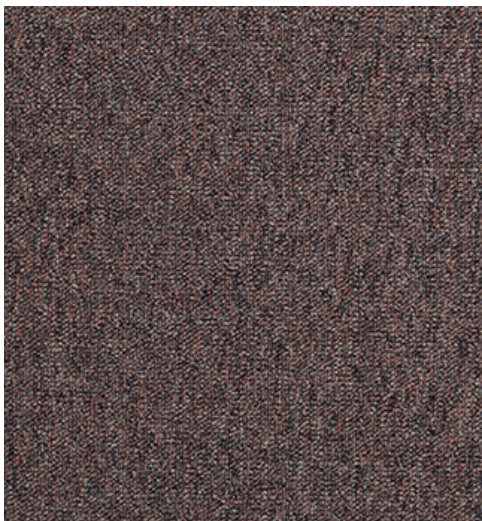

Tomato
374

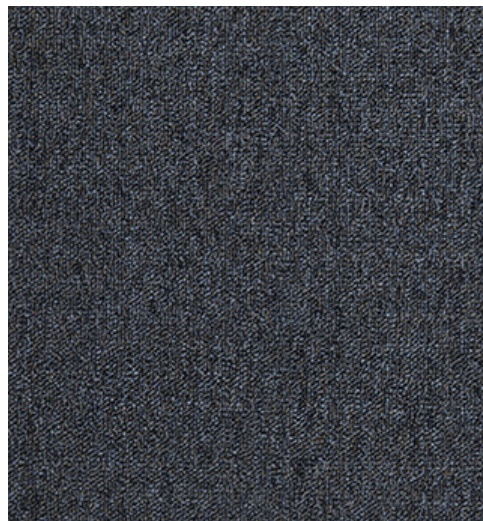


Twilight Shadow
978



Ironstone
679




Emerald
689

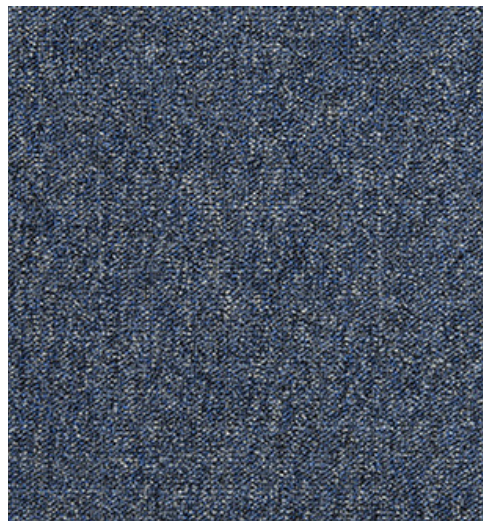


Portofino
559



Blue Ribbon
589

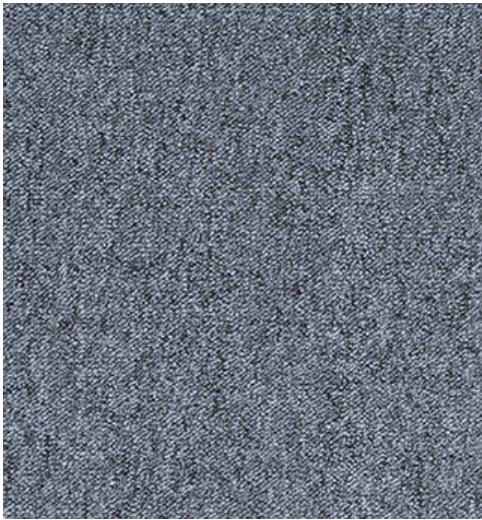

Gravel
965

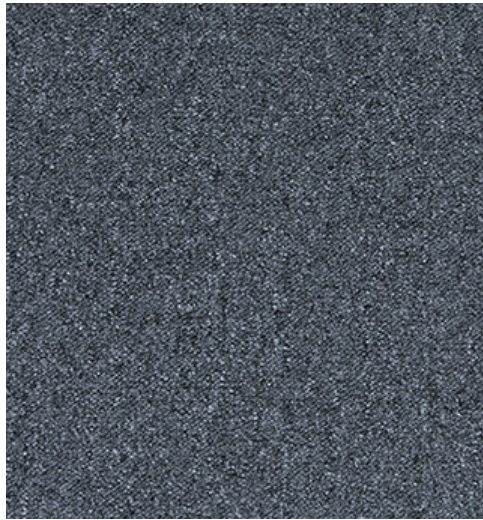

Steel Gray
719



Stainless Steel
964



Bark
879



Obsidian
989

SCHOLARSHIP II

Style Number	2B99
Construction	Tufted
Surface Appearance	Textured Heathered Loop
Gauge	1/10 (39.37 rows per 10cm)
Tufted Weight	20 oz/yd ² (678 g/m ²)
Density	5,179
Dye Method	100% Solution Dyed
Fiber Type	ColorStrand™ SD Nylon
Soil Release Technology	Mohawk Protection Plus Stain Mohawk Protection Plus Soil
Primary Backing	Woven Polypropylene
Secondary Backing	Weldlok®
Indoor Air Quality	Green Label Plus Certified # 8216
Width	12' width (3.66 m)
NSF 140	Gold
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Country of Origin	USA
Warranties	Lifetime Limited Wear Lifetime Static Protection Lifetime Limited Colorfastness to Light 10-Year Limited Stain Resistance 10-Year Limited Colorfastness to Atmospheric Contaminants

SCHOLARSHIP II 26

2B100
Tufted
Textured Heathered Loop
1/10 (39.37 rows per 10cm)
26 oz/yd ² (882 g/m ²)
7,037
100% Solution Dyed
ColorStrand™ SD Nylon
Mohawk Protection Plus Stain Mohawk Protection Plus Soil
Woven Polypropylene
Weldlok® Plus
Green Label Plus Certified # 3802
12' width (3.66 m)
Gold
ASTM E 648 Class 1 (Glue Down)
ASTM E 662 Less than 450
AATCC-134 Under 3.5 KV
USA
Lifetime Limited Wear Lifetime Static Protection Lifetime Limited Edge Ravel, Zippering, Delamination, and Dimensional Stability Lifetime Limited Colorfastness to Light 10-Year Limited Stain Resistance 10-Year Limited Colorfastness to Atmospheric Contaminants



Up to 2,000 sq. yd. available within 10 business days or less

EnviroStrand^{SD}

SCHOLARSHIP II TILE

Style Number	2B101
Construction	Tufted
Surface Appearance	Textured Heathered Loop
Gauge	1/10 (39.37 rows per 10cm)
Tufted Weight	18 oz/yd ² (610 g/m ²)
Density	6,230
Dye Method	100% Solution Dyed
Fiber Type	ColorStrand™ SD Nylon
Soil Release Technology	Mohawk Protection Plus Stain Mohawk Protection Plus Soil
Primary Backing	Non-Woven Synthetic
Secondary Backing	UltraSet®
Indoor Air Quality	Green Label Plus Certified # 1098
Width	24" x 24" (.6096 m x .6096 m)
NSF 140	Gold
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less than 450
Static Propensity	AATCC-134 Under 3.5 KV
Country of Origin	USA
Warranties	Lifetime Limited Wear Lifetime Static Protection Lifetime Limited Edge Ravel, Zippering, Delamination, and Dimensional Stability Lifetime Limited Colorfastness to Light 10-Year Limited Stain Resistance 10-Year Limited Colorfastness to Atmospheric Contaminants



Up to 2,000 sq. yd. available within 10 business days or less

EnviroStrand^{SD}