


ULTRASET®

Carpet tile backing designed for demanding commercial environments

Ultraset® is a premium vinyl carpet tile backing system containing a minimum of 35% recycled content. With over 20 years in the marketplace its ultra dense construction is engineered to offer superior performance while giving greater cushioning properties.

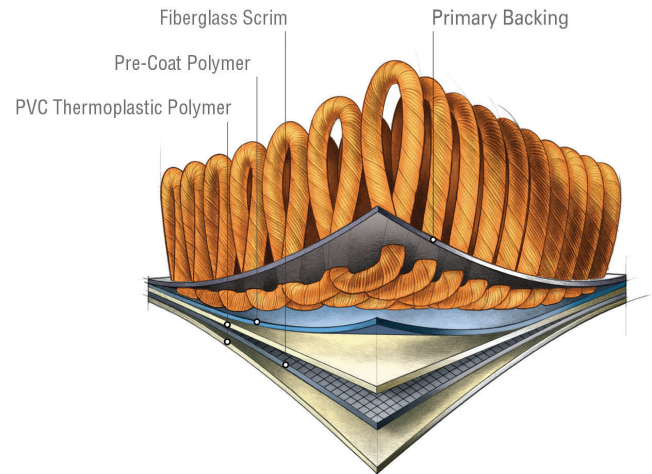

Performance

- Unsurpassed dimensional stability - no growing or shrinking.
- Constructed with an ultra dense five layer cushion backing system.
- Main body of tile provides an effective moisture barrier (not applicable at the seams).
- Carpet tiles are impervious to moisture damage from spills and water extraction cleaning.
- Construction features superior tuft bind that is highly resistant to edge ravel.
- Proven performance for over 20 years.

Sustainability

- Recycleable through Mohawk's ReCover program.
- Minimum of 39% pre-consumer recycled content by total weight.
- Contributes to LEED credits.
- NSF/ANSI 140 Platinum level version available with a minimum of 10% post-consumer recycled content.
- CRI Green Label Plus certified.

Budget

- Superior construction offers reliability for the life of your installation.

Service

- Engineered performance for an overall better after sales service experience.

ULTRASET®

Carpet tile backing designed for demanding commercial environments

INSTALLATION SPECIFICATIONS

Backing	Required Adhesive	Moisture & pH	Adhesive Application Method/ Spread Rate
Ultraset®	EnPress PSA (M004R)	5lbs, 80% RH, 5-9 pH	3/8" Nap Roller - 140/160 sq. yds. 1/16" x 1/32" x 1/32" U Notch Trowel - 100-120 yards (4 Gal)

Floating Installation Adhesive Tabs	Adhesive Application Method	Moisture & pH	Installation Method/ Spread Rate
FLEXLOK (FLXTB)	Apply to back of the tiles per installation guidelines OR Refer to installation guidelines	5lbs, 80% RH, 5-9 pH	Monolithic, Quarter Turn, Multidirectional - 150 SY/Box Brick and Vertical Ashlar - 110 SY/Box

NOTE: Mohawk Optiseal required for installations with subfloor moisture exceeding 5 lbs and/or 80% RH.
Maximum allowable moisture with Optiseal is 90% RH.

LIFETIME LIMITED WARRANTY*

WEAR - Mohawk warrants for the life of the carpet that the carpet tiles will not wear more than 10% of the surface pile for the life of the carpet. "Wear" means the fiber loss from the carpet tiles through normal abrasion and does not include crushing, flattening of the carpet pile in any area, staining, soiling, fading, change in carpet module appearance, nor fiber loss due to abnormal usage of the carpet tile.

STATIC PROTECTION - Mohawk warrants for the life of the carpet that the carpet tiles will not give static discharges in excess of 3.5 KV when tested under AATCC Test Method 134-1979.

EDGE RAVEL/ZIPPERING - Mohawk warrants for the life of the carpet that the carpet tiles will not zipper or develop continuous "pile yarn runners."

DELAMINATION - Mohawk warrants for the life of the carpet that the carpet tiles will not delaminate. Chair pads are not required for this warranty but are recommended for maximum appearance retention.

DIMENSIONAL STABILITY - Mohawk warrants for the life of the carpet that the carpet tiles will not lose their dimensional stability (i.e. shrink, grow, cup, dome) due to normal variations in atmospheric changes (temperature and/or humidity) or when maintained in accordance with the Mohawk's recommended maintenance procedures.

* See Mohawk official warranty documents for further details at www.mohawkflooring.com
LEED and the related logo is a trademark owned by the U.S. Green Building Council is used with permission.